



LADDERLESS[®]

removable light fixtures

(patents pending)

Recessed CFL Down Light Damp Location Rated

**9" IC Rated Dual Horizontal 26w/32w/42w Triple Tubes
Model # ARD-90110-H242**

**6" IC Rated Vertical 26w/32w/42w Triple Tube
Model # ARD-90080-V142**

Key Product Benefits

Simplified Lighting Placement

This high quality recessed fixture has been designed to address your most difficult lighting locations:

- *Stairwells*
- *High ceilings*
- *Over immovable objects*

Reduced Maintenance Costs

Using a pole-mounted removal tool, a user standing on the ground can remove the lamps, reflector, and ballast without using a ladder in one operation. This significantly reduces maintenance time while increasing worker safety.

Flexibility with Applications

The inner assembly can be removed and replaced with other, soon-to-be-available assemblies and trim styles — Wall washers, Parholders on stems, and other options.

Forward Compatibility and Flexibility

Since the inner assembly is removable, future technology can be instantly substituted without significant additional labor costs.



Additional Product Information

Simple, "Ladderless" Operation:

Step 1:

Locate the coupling hole in the fixture, and align the removal tool



Step 2:

Push the removal tool straight up into the fixture





Step 3:

Move the bottom of the tool TOWARD THE CENTERLINE of the fixture, releasing the fixture from the housing



Step 4:

Lower the assembly to the ground (For safety, the assembly will be locked onto the removal tool)

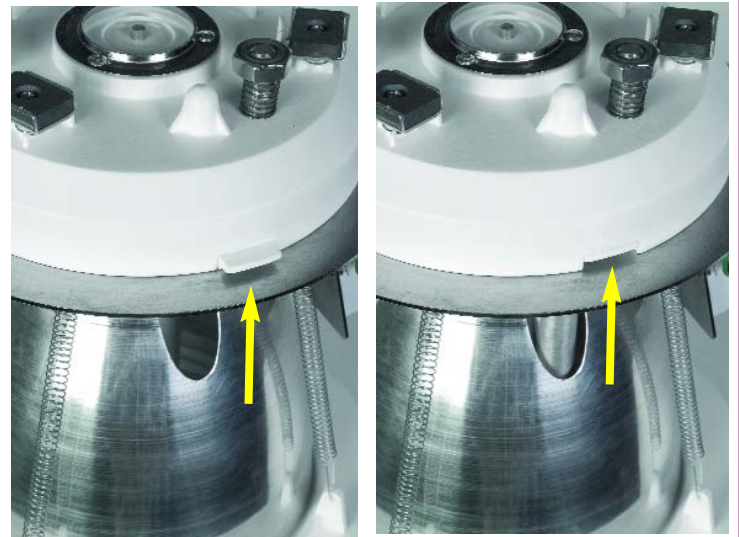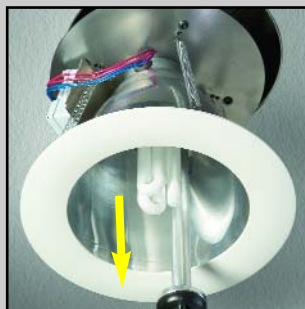

The assembly is securely locked and held into place by latches, which retract when the removal tool is inserted into the fixture. An array of magnets hold the assembly for stability, and allow the removal tool to be pulled out after the assembly is coupled to the housing.

The ballast is removed with the assembly — Ballast replacements become as easy to do as lamp replacements!



See Cut Sheet for Photometrics and Technical Data

A P R O D U C T O F


ACCESSMOUNT™
removable fixture mounting system

Accessmount LLC • 2542 East Aurora Road #203 • Twinsburg, OH 44087
phone 330.487.0210 • fax 928.752.3987 • www.accessmount.com
©2006 Accessmount LLC all rights reserved. rev 5/06

Available At: